


IPG5 PRELIMINARY PRODUCT SUMMARY

IPG5 800V SILICON CARBIDE INVERTER

McLaren Applied's Inverter Platform Generation 5 (IPG5) product harnesses many years of Silicon Carbide (SiC) experience. The IPG5 inverter can power electric motors to over 400 kW¹ peak, 250 kW² continuous, at an unrivalled weight and volume. It has been primarily designed for direct drive automotive applications, capable of operating high-speed motors efficiently.

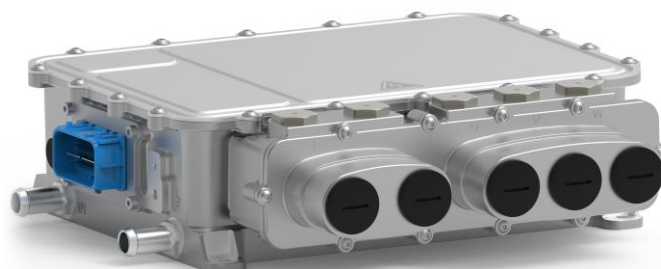

KEY FEATURES

- SiC technology for ultimate compactness and efficiency
- Peak power density (mass)³ >75 kVA/kg
- Peak power density (volume) >125 kVA/L
- High speed motor drive capability, electrical frequency up to 2.5 kHz
- Variable switching frequency 1 - 32 kHz
- AUTOSAR 4.3

ELECTRICAL INPUTS

- High voltage input up to 900 V
- Low voltage input 8 V - 32 V

ELECTRICAL OUTPUTS

- 3 phase output
- Peak current 540 A_{rms}⁴
- Continuous current 320 A_{rms}

ELECTRICAL PERFORMANCE

- Efficiency 97% typical, 99% peak

SAFETY

- ISO 26262 capable, up to ASIL-D
- Integrated HVIL protection

COMMUNICATION AND MOTOR FEEDBACK

- 3 CAN2.0b interfaces (2 with FD option)
- Vehicle CAN message scheme defined according to customer requirements
- 1 Ethernet interface
- Resolver, motor temperature feedback

MECHANICAL

- Dry mass 6.4 kg
- Volume⁵ 4.85 L

ENVIRONMENTAL AND COOLING

- Water/glycol cooled
- Max. coolant inlet temperature 70°C⁵
- Min. coolant flowrate 10 L/min⁵
- Max. coolant pressure 2Bargauge
- Operating temperature range -40°C to +105°C

¹ Subject to further testing – 750 V input voltage, phase current 524 A_{rms}, power factor 0.875, 10 seconds duration, 8 kHz switching frequency

² 750 V input voltage, phase current 320 A_{rms}, power factor 0.875

³ Peak apparent power, 750 V input voltage, phase current 524 A_{rms}, 10 seconds duration

⁴ Subject to further testing – 70°C coolant, 10 L/min flowrate, 8 kHz switching frequency, 10 seconds duration

⁵ To achieve rated specification

